STRAIT-FLEX®

flex-90°®

LAMINATED COMPOSITE CORNER TAPE

Creates fast, perfect, inside and outside 90° corners.

Product Description

- Memory-free hinge design allows for ease of installation, straighter corners and perfect angles.
- Diamond-punched 94 lb. paper edging allows for easier feathering, faster drying, and the highest bonding strength. Also guarantees an even lay-down of the paper, providing maximum adhesion with no rippling or blistering.
- PUR-laminated nose ensures perfect corners without paper fuzz-up during finishing and sanding.
- Prefinished surface. Just skim coat edges to finish.
- Rustproof.
- Cuts easily with knife or scissors.
- Straightens small framing irregularities.
- No cracks. No callbacks.

Applications

- Inside and outside 90° corners.
- Inside 90° corners where a large fill or straightening is required.
- Inside corners of bay windows, coffers and off angles.

STRAIT-FLEX®

flex-90®

Advantages over Competitors

STRAIT-FLEX **FLEX-90**	*COMPETITOR* ZOOMA-FLEX®	*COMPETITOR* SURE CORNER® PAPER/METAL FLEX
Pre-finished Surface	Pre-finished Surface	Unfinished Surface
PUR-Laminated Nose	No Protective Nose	No Protective Nose
Diamond-Punched 94 lb. Paper	Latex-Saturated 84 lb. Paper	Standard 84 lb. Paper
Paper Does Not Curl	Paper Curls	Paper Wrinkles and Curls
Will Not Rust	Will Not Rust	Can Rust
Inside/Outside 90° Off Angles	Inside 90° Corners Off Angles	Inside 90° Corners Off Angles



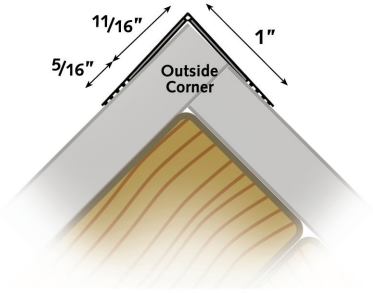

Directions for Use

1. Cut Strait-Flex FLEX-90 to desired length. Fold in half at center crease to desired angle.
2. Using a 5" or 6" taping knife, apply a liberal coat of all-purpose joint compound to inside or outside corners.
3. Press FLEX-90 into wet compound. Adjust if necessary to create a straight line and wipe down with taping knife. Immediately apply light skim coat of joint compound and let dry.
4. Apply final coat, let dry, and sand.

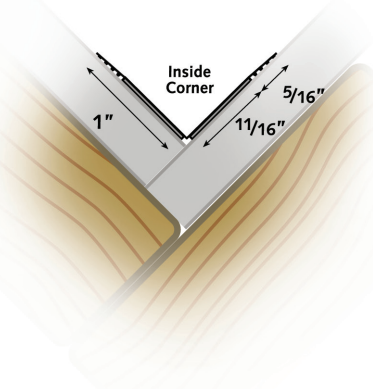

Specifications

- 2" x 50' roll size.
- Color Code RED
- Item# F90-50-6
- RETAIL PKG
  6rls per tray. One tray per case. (6-Pack)
  Case weight: 9 lbs.
  48 cases per pallet.

- 2" x 50' roll size.
- Color Code RED
- Item# F90-50-12
- RETAIL PKG
  6rls per tray. Two trays per case. (12-Pack)
  Case weight: 17 lbs.
  24 cases per pallet.

- 2" x 100' roll size.
- Color Code RED
- Item# F90-12
- WHOLESALE PKG
  12rls per case.
  Case weight: 34 lbs.
  24 cases per pallet.
- RETAIL PKG
  6rls per tray. Two trays per case. (12-Pack)
  Case weight: 35 lbs.
  24 cases per pallet.

Warranty

Strait-Flex products are backed by a lifetime warranty. When applied to a sound structure, built on a permanent foundation using recommended application techniques, we warrant that these products will not edge-crack for the lifetime of the structure. Contact Strait-Flex International, Inc. for complete details.

Storage

Store in a dry place protected from moisture.

Endorsements

Strait-Flex products are endorsed by the IUPAT (International Union of Painters and Allied Trades) of North America. Strait-Flex products are used in their day-to-day training curriculums.

Check out our website at www.straitflex.com

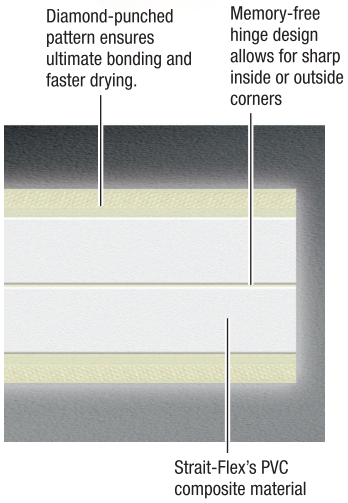
Diamond-punched pattern ensures ultimate bonding and faster drying.
Memory-free hinge design allows for sharp inside or outside corners
Strait-Flex's PVC composite material

STRAIT-FLEX INTERNATIONAL, INC. O'FALLON, MO
PHONE: 888.747.0220 FAX: 636.300.0414
STRAITFLEX.COM